

Time switch in surface mount box 75mm x 75mm

Features



- Programming by fixed segments. A red zone is unmasked by the segment when put in the 'ON' state; in the 'OFF' state, this red zone is masked.
- Time indication by clock hands, allowing time setting by a simple rotation.
- Manual instantaneous pre-set control with automatic return to normal operation of the program.
- Display of contact state
- Unpluggable time switch with stirrup terminals integrated in the box. Attachments without accessories:
 - Surface mounted
 - On symmetrical rail
 - Flush fitted
- 16A changeover potential free contact

Functional characteristics


- Programming in steps of 15 mins
- Minimum interval between 2 switchings : 30 minutes
- 48 switchings per day
- Power On light indicator

Technical characteristics

Power supply	110 - 240 V
Frequency	50/60 Hz
Changeover contact	16A / 240 V
Timebase	quartz crystal
Operating temperature	-10 °C to +50 °C
Storage temperature	-20 °C to +60 °C
Connection by stirrup terminals, conductor cross section	1 to 6 mm ²
Insulation class	II
Degree of protection	IP 20 / IK 03
Conformity to EN 60.730 standard	yes

*Performances indicated for an ambient temperature of 20 °C

Dimensions

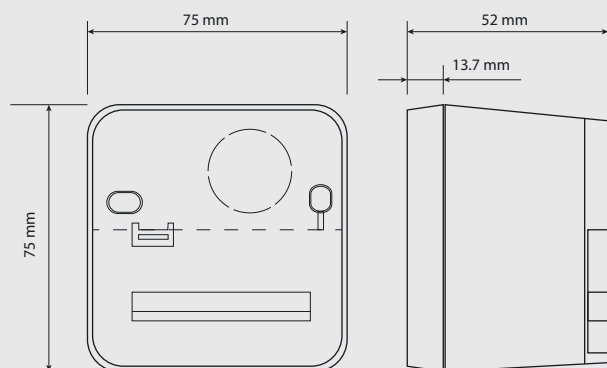

Electrical connection

