


# NON-INSULATED KS PIN TERMINALS

## Non-Insulated KS Pin terminal

KS PIN type terminals are made from electrolytic copper pipe with a tinplated finish for improved electrical contact.

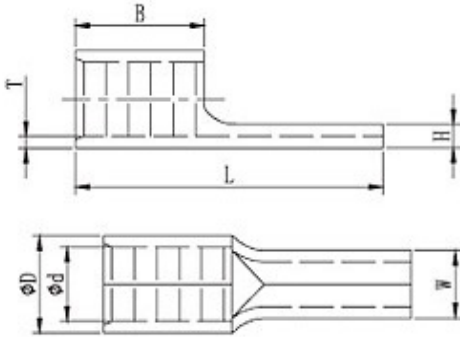

ITEM NO	Wire Range	DIMENSIONS (mm)						
	(mm <sup>2</sup> )	L	B	W	d	D	H	T
KS10-12	10.0	22.00	8.00	4.30	4.50	6.90	2.40	1.10
KS16-13	16.0	26.00	10.00	5.50	5.90	8.40	2.60	1.20
KS25-15	25.0	33.50	13.50	6.80	7.00	9.50	2.60	1.20
KS35-20	35.0	40.50	16.00	8.00	8.70	11.80	3.20	1.50
KS50-20	50.0	45.00	19.00	9.50	9.80	13.60	3.80	1.80
KS70-25	70.0	55.00	24.00	11.00	11.60	15.80	4.20	2.00
KS95-25	95.0	55.00	24.00	12.50	13.70	18.90	5.20	2.50
KS120-34	120.0	62.00	26.00	14.30	15.10	21.30	6.20	3.00
KS150-37	150.0	63.00	27.50	16.80	16.50	23.00	6.60	3.20
KS185-38	185.0	70.50	35.00	19.00	19.00	26.00	7.20	3.45
KS240-44	240.0	82.50	40.50	21.50	21.20	29.20	8.00	3.95



# Reyluc