






TP0132-6
 TP0232-6
 Voltage(V) : 220-240V
 Protection degree : IP67

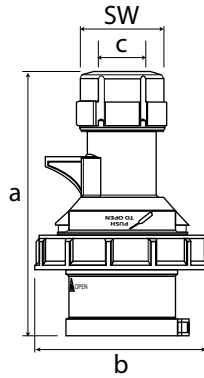


TP0142-6
 TP0242-6
 Voltage(V) : 380-415V
 Protection degree : IP67

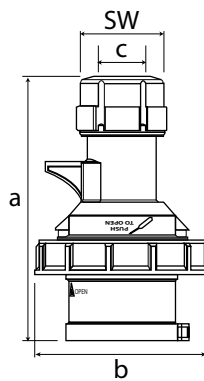

TP0152-6
 TP0252-6
 Voltage(V) : 380-415V
 Protection degree : IP67

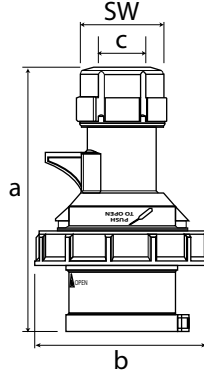

TP0242-3
 Voltage(V) : 380-415V
 Protection degree : IP67
 (For Container use)

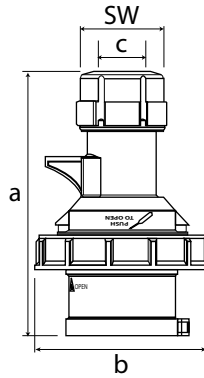

Earth contact position	6h		
Rated current (A)	16	32	
	Pole		
		2	
Dimension (mm)	a	118	146
	b	80	93
	c	6-15	10-20
	SW	38	50
Cable nominal cross-section area (mm ²)		1-2.5	2.5-6

Earth contact position	6h		
Rated current (A)	16	32	
	Pole		
		3	
Dimension (mm)	a	124	146
	b	79	93
	c	6-15	10-20
	SW	38	50
Cable nominal cross-section area (mm ²)		1-2.5	2.5-6

Earth contact position	6h		
Rated current (A)	16	32	
	Pole		
		4	
Dimension (mm)	a	133	155
	b	87	99
	c	8-16	10-20
	SW	42	50
Cable nominal cross-section area (mm ²)		1-2.5	2.5-6

Earth contact position	3h	
Rated current (A)	32	
	Pole	
		3
Dimension (mm)	a	146
	b	93
	c	10-20
	SW	50
Cable nominal cross-section area (mm ²)		2.5-6