





C233
C243
Voltage(V) : 220-240V
Protection degree : IP67



Earth contact position	6h	
Rated current (A)	63	125
Pole	2	
Dimension (mm)		
a	240	309
b	115	129
c	16-38	30-64
d	108	123
Cable nominal cross-section area (mm ²)	6-16	16-50

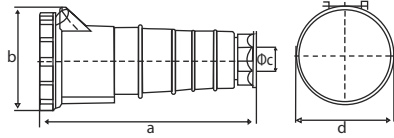


C234
C244
Voltage(V) : 380-415V
Protection degree : IP67

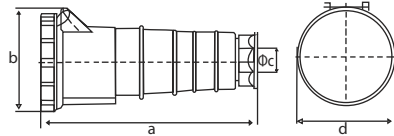

Earth contact position	6h	
Rated current (A)	63	125
Pole	3	
Dimension (mm)		
a	240	309
b	115	129
c	16-38	30-64
d	108	123
Cable nominal cross-section area (mm ²)	6-16	16-50



C235
C245
Voltage(V) : 220-415V
Protection degree : IP67

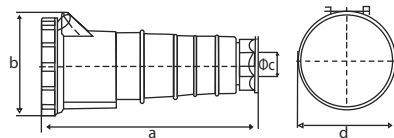

Earth contact position	6h	
Rated current (A)	63	125
Pole	4	
Dimension (mm)		
a	240	309
b	115	129
c	16-38	30-64
d	108	123
Cable nominal cross-section area (mm ²)	6-16	16-50