




Twistlock Gen 1 Coupler (IP67)




TC2132
TC2232
Voltage(V) : 220-240V
Protection degree : IP67

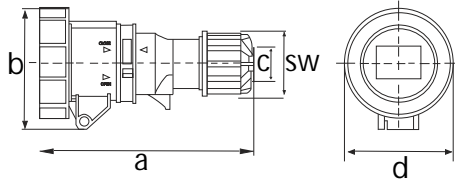

Earth contact position	6h	
Rated current (A)	16	32
	Pole 2	
Dimension (mm)	a	141
	b	78
	c	6-15
	d	71
	sw	44
Cable nominal cross-section area (mm ²)	1-2.5	2.5-6




TC2142
TC2242
Voltage(V) : 380-415V
Protection degree : IP67

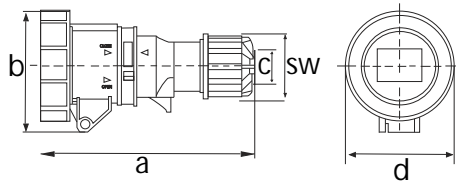

Earth contact position	6h	
Rated current (A)	16	32
	Pole 3	
Dimension (mm)	a	146
	b	85
	c	6-15
	d	80
	sw	44
Cable nominal cross-section area (mm ²)	1-2.5	2.5-6




TC2152
TC2252
Voltage(V) : 380-415V
240-415V
Protection degree : IP67

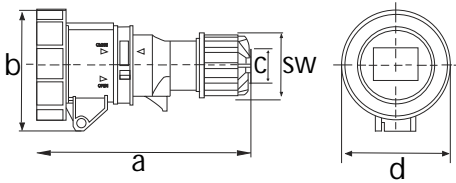

Earth contact position	6h	
Rated current (A)	16	32
	Pole 4	
Dimension (mm)	a	155
	b	93
	c	6-15
	d	85
	sw	44
Cable nominal cross-section area (mm ²)	1-2.5	2.5-6



TC2242-3
Voltage(V) : 110-130V
Protection degree : IP67

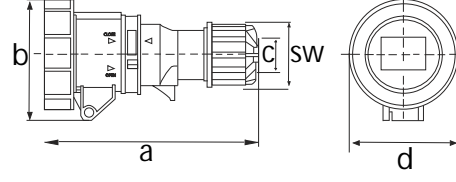

Earth contact position	3h	
Rated current (A)	32	
	Pole 4	
Dimension (mm)	a	172
	b	97
	c	10-20
	d	93
	sw	54
Cable nominal cross-section area (mm ²)	2.5-6	