




S133-6  
S143-6  
Voltage(V) : 220-240V  
Protection degree : IP67

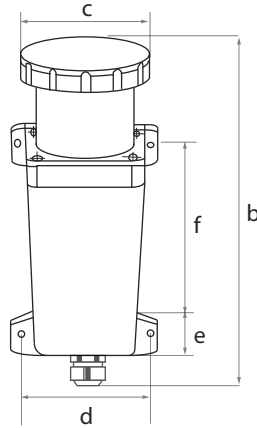


a = Height

Earth contact position	6h	
Rated current (A)	63	125
Pole	2	
Dimension (mm)		
a	134	154
b	311	338
c	108	122
d	111	130
e	20	20
f	155	187
Cable nominal cross-section area (mm <sup>2</sup> )	6-25	25-70



S134-6  
S144-6  
Voltage(V) : 380-415V  
Protection degree : IP67

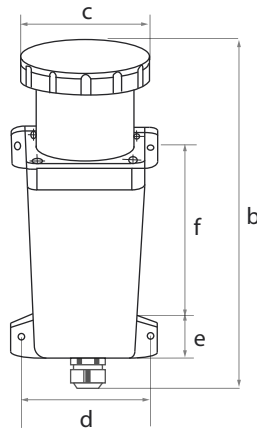


a = Height

Earth contact position	6h	
Rated current (A)	63	125
Pole	3	
Dimension (mm)		
a	134	154
b	311	338
c	108	122
d	111	130
e	20	20
f	155	187
Cable nominal cross-section area (mm <sup>2</sup> )	6-25	25-70



S135-6  
S145-6  
Voltage(V) : 220-415V  
Protection degree : IP67

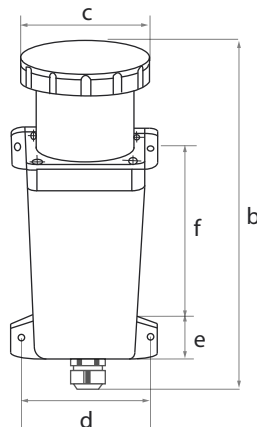

a = Height

Earth contact position	6h	
Rated current (A)	63	125
Pole	4	
Dimension (mm)		
a	134	154
b	311	338
c	108	122
d	111	130
e	20	20
f	155	187
Cable nominal cross-section area (mm <sup>2</sup> )	6-25	25-70