




CABLE LINK FOR COMPACT CABLE

KEY FEATURES


- DESIGNED FOR JOINTING LOW-VOLTAGE CONDUCTORS
- A CENTRAL STOP IS INTRODUCED TO ENSURE CORRECT POSITIONING OF CONDUCTORS
- TAPERED ENDS AT BOTH ENTRY POINTS TO ENSURE EASE OF CONDUCTOR INSERTION

MATERIALS/FINISH

- HIGH CONDUCTIVITY SEAMLESS COPPER TUBE WHICH CONFORMS TO BS2874-C 101/ASTM B 152-C11000
- ELECTROLYTICALLY TIN-PLATED TO AVOID OXIDATION



ITEM	DIMENSIONS		
	C	A	L
RL1.5	3.7	1.8	20
RL2.5	4	2.4	20
RL4	4.8	3.1	20
RL6	5.5	3.8	20
RL10	6.2	4.5	20
RL16	7.1	5.4	35
RL25	8.8	7	40
RL35	10	8	40
RL50	11	9	40
RL70	14	11.2	50
RL95	17.4	13.5	50
RL120	19.4	15	55
RL150	21.2	16.5	60
RL185	23.5	18.5	65
RL240	26.5	21	80
RL300	30	23.5	85
RL400	36.5	28.5	90
RL500	39	30	100
RL630	45	35	110

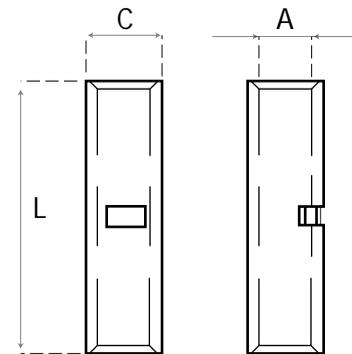

* VARIOUS SPECIAL SIZES ON REQUEST



Reyluc